

Coralais® Centerset Bathroom Sink Faucet K-15241-4RA

Features

- Two-handle centerset bathroom sink faucet for 4" centers.
- 4-7/16" (112 mm) spout reach.
- 1.2 gal/min (4.5 l/min) maximum flow rate [max at 60 psi (4.14 bar)].
- Includes metal pop-up drain with lift rod and 1-1/4" tailpiece.
- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- Red/blue indexing.
- Reversible quarter-turn washerless ceramic disc valves.
- Coordinates with Coralais faucets, accessories, and showering components to complete your bathroom.

Material

- Premium Metal Construction
- KOHLER finishes resist corrosion and tarnishing.


Installation

- For 4" (102 mm) centers.
- Deck-mount installation
- Pre-attached flexible supply lines simplify installation.

Optional Accessories

1160594 .35 gpm Aerator, Large





Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI 61 NSF/ANSI 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 EPA WaterSense® ADA ICC/ANSI A117.1 CSA B651 OBC

KOHLER[®] Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color Code Description


C	
(

- CP Polished Chrome
- G Brushed Chrome



KOHLER. Faucets

Centerset Bathroom Sink Faucet K-15241-4RA

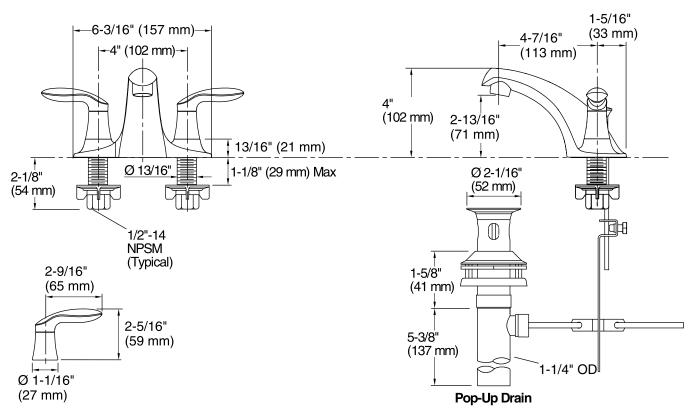

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate:	1.2 gal/min (4.5 l/min)
Pressure:	60 psi (4.1 bar)
Valve body:	Machined-brass
Drain with overflow:	Yes
Drain tailpiece included:	Yes
Spout:	
Spout reach:	4-7/16" (112 mm)

Spout reach: 4-7/16" (112 mm) Handle clearance: 2-9/16" (65 mm)

Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

