

- Brass construction
- For single-hole installation
- One-piece, self-contained ceramic disc valve which allows both volume and temperature setting
- Temperature memory allows the faucet to be turned on and off at any temperature setting
- 4-3/8" (111 mm) spout reach
- Stationary spout
- Metal grid drain with metal tailpiece
- Flexible connections
- 0.5 gal/min (1.9 l/min) maximum flow rate [max at 80 psi (5.5bar)]



ADA

CSA B651

OBC

Codes/Standards

ASME A112.18.1/CSA B125.1

NSF/ANSI 61

NSF/ANSI 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

CSA B651

OBC

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.


Available Colors/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|



| | |
|----|-----------------|
| CP | Polished Chrome |
|----|-----------------|

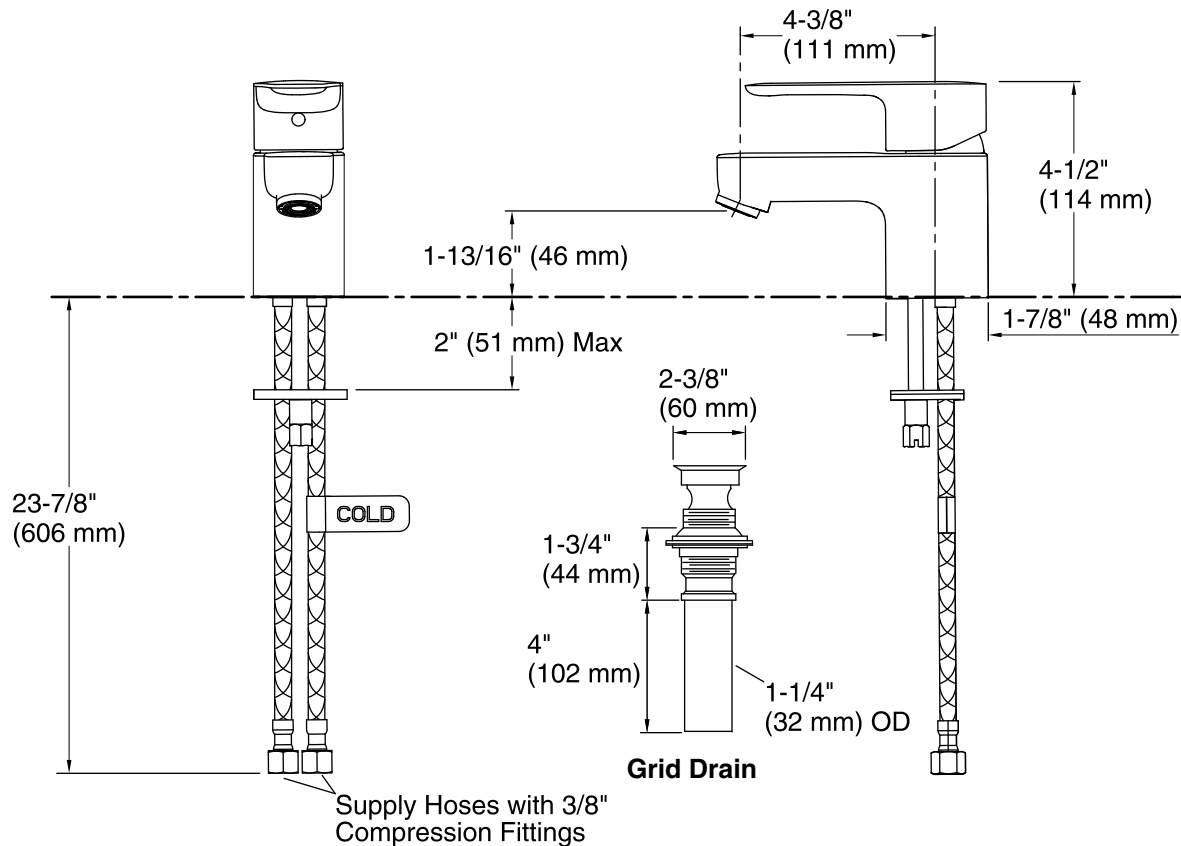

Technical Information

All product dimensions are nominal.

Faucet:

| | |
|---------------------------|-------------------------|
| Flow rate: | 0.5 gal/min (1.9 l/min) |
| Pressure: | 80 psi (5.5 bar) |
| Drain included: | Yes |
| Drain with overflow: | Yes |
| Drain tailpiece included: | Yes |

Spout:

| | |
|-------------------|-----------------|
| Spout reach: | 4-3/8" (112 mm) |
| Handle clearance: | 4-1/8" (105 mm) |

Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.