

**E3 MANHOLE SEAL®**

# **ADAPTOR**

**SEAL EXTERNALLY FROM THE CASTING  
TO THE CONE WITH OUR E3 MANHOLE SEAL.  
THIS COST-EFFECTIVE, TIME-SAVING SOLUTION  
REQUIRES NO SPECIAL TOOLS, PRIMERS OR  
TORCHES TO INSTALL.**

## **Advantages**

- Easy external install
- No special tools required
- Saves money
- Available in 8", 14" and 18" sleeve lengths
- Custom sizing available upon request




**CALL OR VISIT OUR WEBSITE TO LEARN MORE**

2151 South 54th Street, West Allis, WI 53219 • office 414.764.6733 • fax 414.764.1494 • [adaptorinc.com](http://adaptorinc.com) •



**American Made**

# E3 MANHOLE SEAL

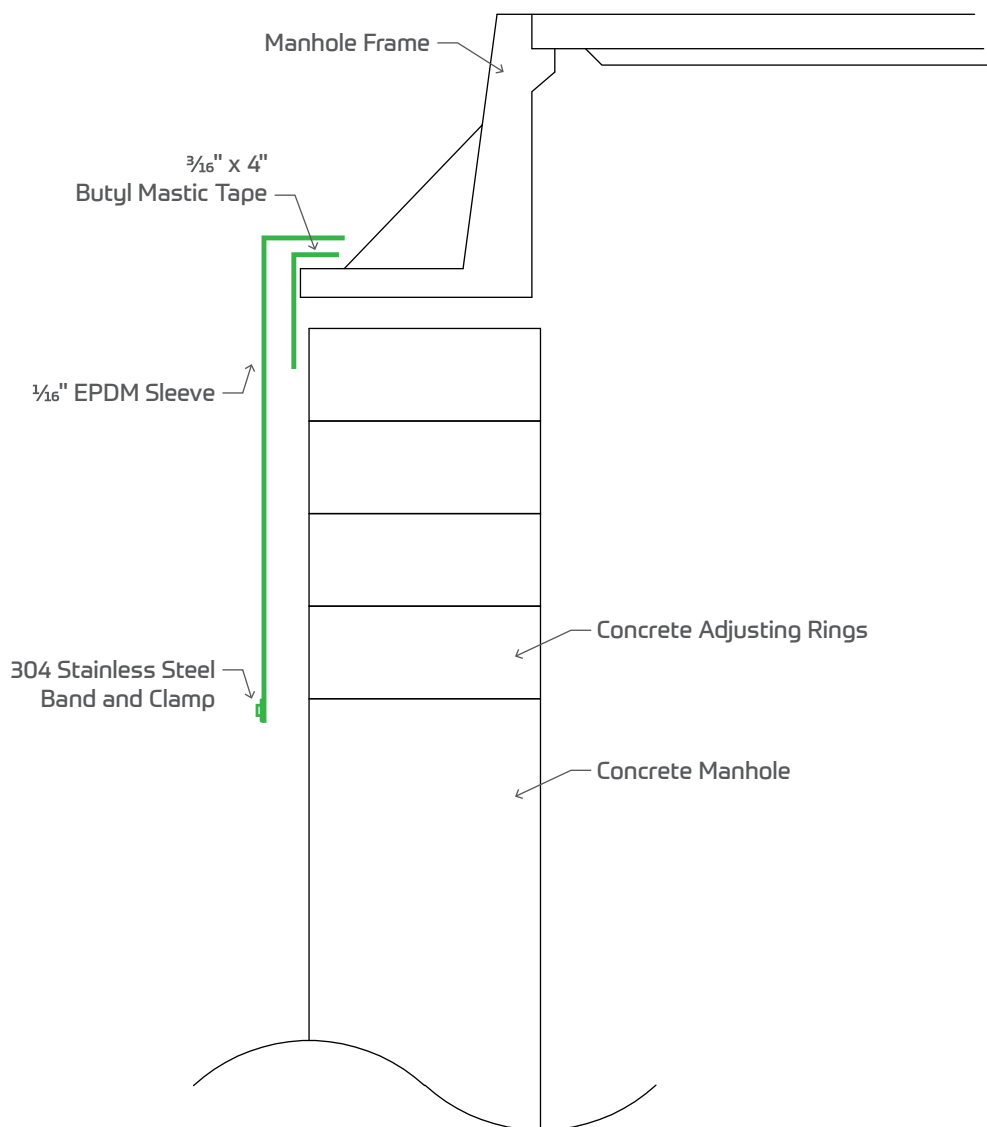

## Product Details

The E3 Manhole Seal is designed to prevent infiltration of water into the manhole by sealing it externally.

The E3 Manhole Seal shall have a high-grade EPDM rubber sleeve with a minimum thickness of .065" and elongation of 350%. A 4" by 3/16" thick butyl mastic tape shall be applied 2" onto the casting flange and the rest over the top adjusting ring. A bead of 100% butyl caulk will be applied to the 2" vertical lip of the cone section and the rubber sleeve will be held in place with a 304 stainless-steel band and clamp.

### Order Information Needed

- \* **Casting ID#:** example (1661, 1550, 1022-z2)
- \* **Sleeve length:** 8", 14" and 18"
- \* **O.D. of adjusting rings :** (34", 35", 36", 38", 40")

