





Submitted Model No.:

Specific Features: _

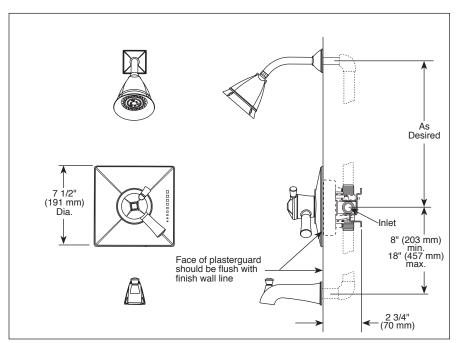







RP71649▲ Shower Arm & Flange

▲ Designate proper finish suffix

BRIZO

TUB AND SHOWER FAUCET TRIM

- Vesi[®] Collection
- TempAssure[®] Thermostatic
- Valve Only (T60040)
- Shower Only (T60240)
- Tub/Shower (T60440)

STANDARD SPECIFICATIONS:

- TempAssure® 60 series thermostatic valve cartridge.
- Thermostatic wax element maintains the outlet temperature to ±3.6°F.
- Must also order MultiChoice® Universal rough valve body (R60000 Series).
- Back-to-back installation capability.
- Lever volume control handle; temperature adjustment dial.
- Graphics indicate hot/cold temperature adjustment.
- Field adjustable to limit handle rotation into hot
- All parts replaceable from the front of the valve.
- Adjusts for up to 1" wall thickness.
- Multi-function showerhead 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa (RP42431), 2.5 gpm @ 80 psi, 9.5 L/min @ 550 kPa (RP42431-2.5) sold with T60240 and T60440.
- Tub port maximum flow rate 8.6 gpm @ 60 psi with R60000-UNBX

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASSE 1016

(51 mm)

- Indicates compliance to ICC/ANSI A117.1- Valve control only
- EPA WaterSense®

Brizo Kitchen & Bath Company

55 E. 111th Street, Indianapolis, Indiana 46280 350 South Edgeware Road, St. Thomas, ON N5P 4L1 © 2018 Brizo Kitchen & Bath Company