



Submittal Data Sheet

FLR STND, DUCTLESS ID 1.5 TON

FVXS18NVJU

FEATURES

- Matches with *MXS & RMXS multi-port models only
- Up to 18.9 SEER / Up to 12.7 EER / Up to 12.5 HSPF
- Floor standing, compact design
- Partial recess option

BENEFITS

- Utilizes minimal floor space
- 12 Year limited parts warranty with online registration
- 5 Year limited parts warranty for commercial applications
- High efficiency cooling and heating operation provides utility bill savings
- May qualify for regional utility rebates and incentives
- Compatible with optional Daikin ENVi Wi-Fi capable Smart Control





Submittal Data Sheet

FLR STND, DUCTLESS ID 1.5 TON

FVXS18NVJU

PERFORMANCE

Indoor Unit Model No.	FVXS18NVJU	Indoor Unit Name:	FLR STND, DUCTLESS ID 1.5 TON
Type:	Wall Mounted	Rated Cooling Conditions:	Indoor (°F DB/WB): / Ambient (°F DB/WB): /
Rated Cooling Capacity (Btu/hr):	18,000	Rated Heating Conditions:	Indoor (°F DB/WB): / Ambient (°F DB/WB): /
Sensible Capacity (Btu/hr):		Rated Piping Length(ft):	
Cooling Input Power (kW):		Rated Height Separation (ft):	
Rated Heating Capacity (Btu/hr):	18,000		


INDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208-230 / 60 / 1	Airflow Rate (H) (CFM):	378
Power Supply Connections:		Moisture Removal (Gal/hr):	
Min. Circuit Amps MCA (A):		Gas Pipe Connection (inch):	1/2
Max Overcurrent Protection (MOP) (A):		Liquid Pipe Connection (inch):	1/4
Dimensions (HxWxD) (in):	23-5/8 x 27-1/2 x 8-1/4	Condensate Connection (inch):	3/4
Panel (HxWxD) (in):		Sound Pressure (H/SL) (dBA):	44/32
Net Weight (lb):	31	Sound Power Level (dBA):	
Panel Weight (lb):		Ext. Static Pressure (Rated/Max) (inWg):	/

Submittal Data Sheet
 FLR STND, DUCTLESS ID 1.5 TON
 FVXS18NVJU

DIMENSIONAL DRAWING

NOTE 1. THE MARK (→) SHOWS PIPING DIRECTION

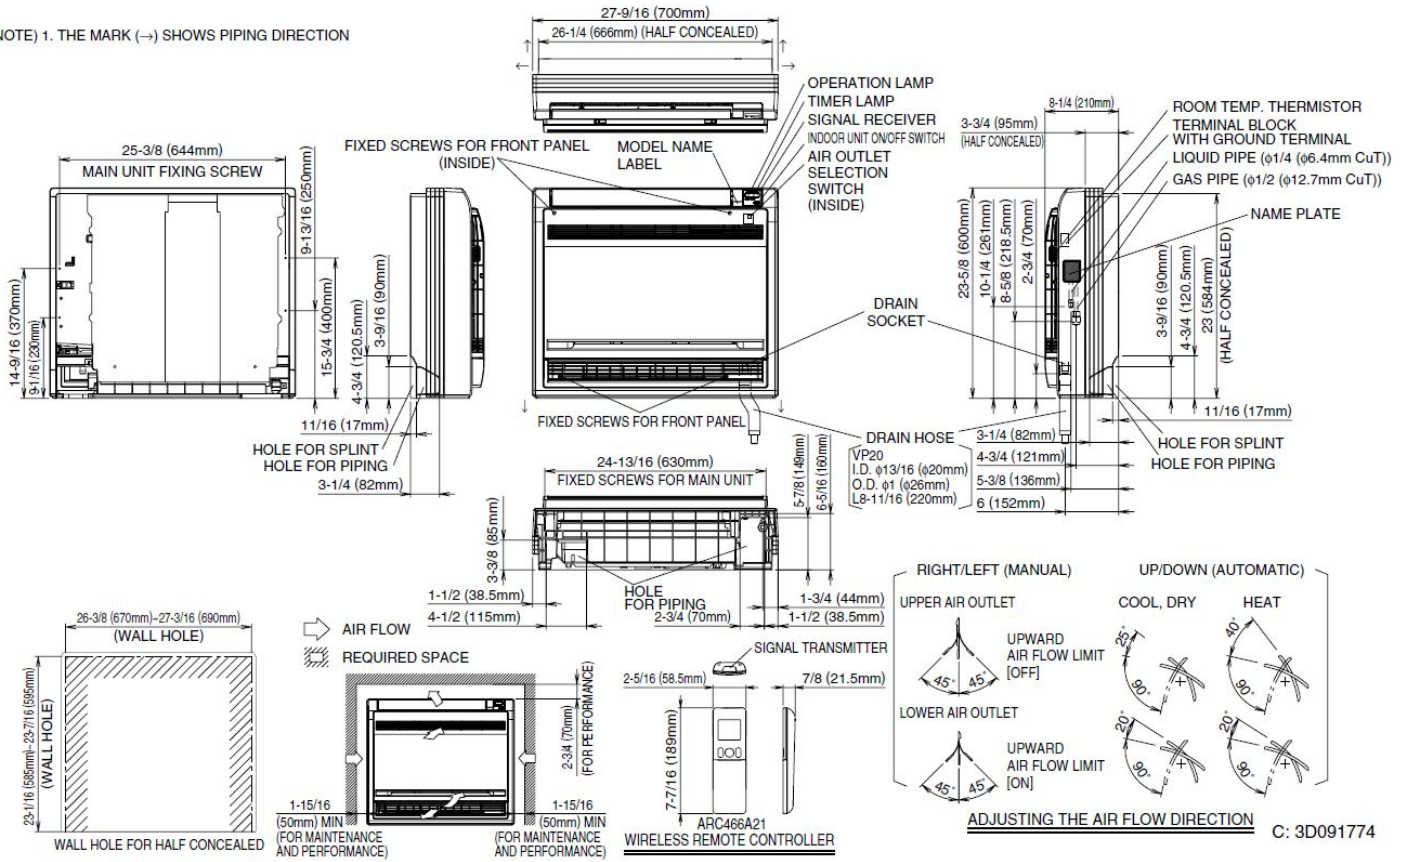

ADJUSTING THE AIR FLOW DIRECTION C: 3D091774